

REMS Eco-Press

Universal, manual radial press for producing pipe pressing joints for all common pressfitting systems.

Pressing joints with plastic and multi-layer composite tubes \varnothing 10–26 mm

REMS pressing tongs, also suited for drive units of other makes, see page 84–88.

REMS Eco-Press – universal up to \varnothing 26 mm.

Secure crimping in seconds.

Complete assortment of REMS pressing tongs for all common pressfitting systems.

System advantage

Only one type of pressing tongs for all REMS radial presses and radial presses of other makes. All pressing tongs marked with * fit into the REMS Eco-Press drive unit also. Thus simple, inexpensive stocking.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs for all common pressfitting systems (page 84–88). High-compression pressing tongs in forged and specially hardened steel. Pressing contours of REMS pressing tongs are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing.

All pressing tongs marked with * have two connection points (**Patent US 6,739,172, Patent EP pending**) for manual drive through the manual radial press REMS Eco-Press and for electric drive through all REMS radial press machines and suitable radial presses of other makes.

Execution

Compact, handy, light. Drive unit with short tubular arms only 1.6 kg. Works anywhere, free-hand, overhead, in confined areas. Secure seating of pressing tongs through locking pins. Dividable tubular arms for individual adjustment of leverage to accommodate different force demands of different pressfitting systems.

Pressing operation

A perfect joint is achieved when pressing tongs close completely. Final-lock-positioning, the pressing jaws remain in a closed position until opening. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

Confirmation of suitability

See page 89.

Hold-harmless and indemnification agreement

See page 90.



Patent US 6,739,172
Patent EP pending



German Quality Product




CHRYSSAFIDIS

Supply format

REMS Eco-Press drive unit. Manual radial press with final-lock-positioning for producing pressing joints of plastic and multi-layer composite tubes \varnothing 10–26 mm. For operating with REMS pressing tongs. With dividable tubular arms. In skin package.

	Art.-No.	
	574000	

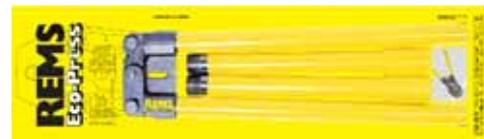

Accessories

Description	Art.-No.	
REMS pressing tongs see page 84–88.		
REMS cropping tongs for threaded rods see page 91.		
Carrying bag for drive unit and for 3 pressing tongs	574436	
Steel case with insert for drive unit and for 3 pressing tongs	574430	

