

**J41H — 16****J41T — 16****J41W — 16****CAST IRON GLOBE VALVES**

H, T- < 200°C, W- < 100°C  
 DIN2533  
 DIN3202F1  
 GB12233

Available Medium: Water, Steam, Petroleum Products

T—Water, Steam

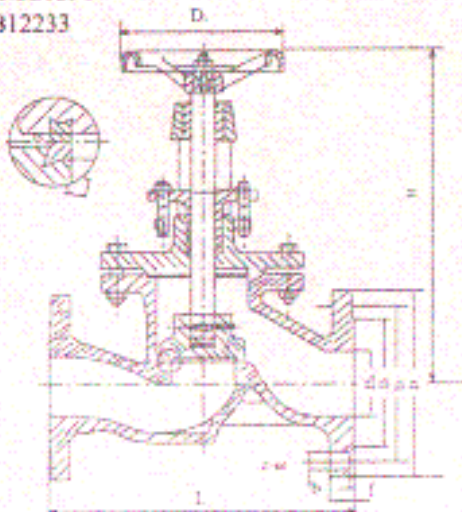
W—Petroleum Products

Working Temperature: H, T- < 200°C, W- < 100°C

Flange dimensions: DIN2533

Face to face dimensions: DIN3202F1

J41H-16  
 J41T-16

**MATERIALS**

PARTS NAME	MATERIAL		
	J41H — 16	J41T — 16	J41W — 16
BODY BONNET	GRAY CAST IRON	GRAY CAST IRON	GRAY CAST IRON
DISC	GRAY CAST IRON + STAINLESS STEEL	GRAY CAST IRON + BRASS	GRAY CAST IRON
SEAL RING	STAINLESS STEEL	CAST BRASS	GRAY CAST IRON
STEM	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
STEM NUT	CAST BRASS	CAST BRASS	CAST BRASS
GASKET	GRAPHITE	GRAPHITE	GRAPHITE
PACKING	GRAPHITE	GRAPHITE	GRAPHITE

**DIMENSIONS**

CHRYSsafidis S.A./ ATHENS: 3 AGRINIOU STR, TAVROS - (+30) 210 4836315-20 /  
 THESSALONIKI: DA12A STR, OT32, BIPE SINDOU - (+30) 2310 754681-4 /  
[www.chryssafidis.com](http://www.chryssafidis.com) / [sales@chryssafidis.gr](mailto:sales@chryssafidis.gr)

DN	L	D	D1	D2	b	f	Z-φd	D <sub>s</sub>	H	WT(kg)
15	130	95	65	45	14	2	4-14	100	176	3.32
20	150	105	75	55	16	2	4-14	100	180	3.8
25	160	115	85	65	16	2	4-14	120	232	5.07
32	180	135	100	78	18	2	4-18	120	238	8
40	200	145	110	85	18	3	4-18	140	262	9.39
50	230	160	125	100	20	3	4-18	140	272	11.40
65	290	180	145	120	20	3	4-18	160	323	18
80	310	195	160	135	22	3	8-18	200	353	30.7
100	350	215	180	155	24	3	8-18	280	381	40
125	400	245	210	185	26	3	8-18	320	453	62
150	480	280	240	210	28	3	8-23	360	502	91
200	600	335	295	265	30	3	12-23	400	620	152.2