



ΚΑΝΟΥΑΕΣ ΟΡΕΙΧΑΑΚΙΝΕΣ ΓΙΑ ΛΟΥΚΕΤΟ

HOSE UNION BALL BIB-COCK LOCKABLE TYPE

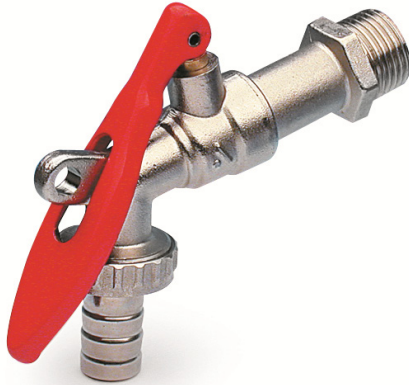

- BRASS "CW617N" BODY, BALL, STEM.
- BALL GROUND BY DIAMOND-TIPPED TOOL, NICKEL AND CHROMIUM PLATED.
- VIRGIN P.T.F.E. SEATS WITH 7° MIN. TIGHTNESS ANGLE.
- O-RING STEM PACKING IN NBR RUBBER.
- CARBON STEEL LOCKING LEVER WITH RED PLASTIC COATING.
- CHROMIUM PLATED FINISHING.
- THREADING TO ISO 228/1.
- 25 bar – T max. 90°C

LEADING DIMENSIONS

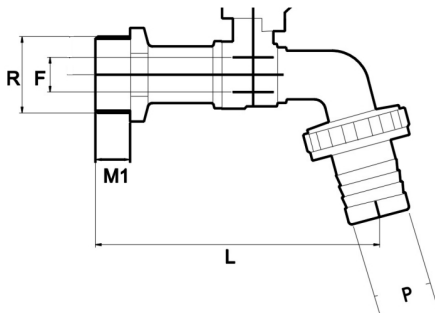

R	1/2"
F (mm)	11
L (mm)	92
M1 (mm)	13
P (mm)	14
R1	3/4"

WORKING PRESSURES AT 80° C MAX

PN 25	*	p.s.i. 375
	1/2"	

PRESSURE DROPS

R	1/2"
Kv	9