


KOWO


CHRYSsafidis

16K 船用青铜法兰截止阀

16K 船用青铜法兰截止止回阀

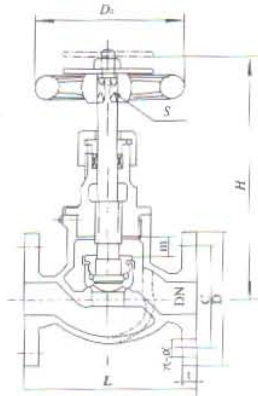


MAIN DATA(mm)

DN	L	H	Flange dimensions					Hand wheel	
			D	C	t	n	d	D ₀	S
15	110	130	95	70	12	4	15	80	8
20	120	140	100	75	14	4	15	100	10
25	130	160	125	90	14	4	19	125	10
32	160	170	135	100	16	4	19	125	10
40	180	190	140	105	16	4	19	140	12

Marine Bronze Globe Valves JIS F7303 16K

Marine Bronze Screw Down Check Globe Valves JIS F7409 16K

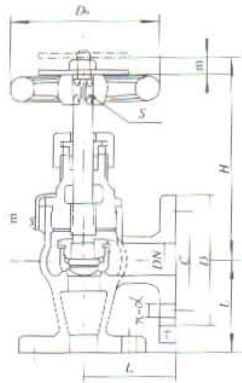

MAIN DATA (mm)

DN	L	H	Flange dimensions					Hand wheel	
			D	C	t	n	d	D ₀	S
15	70	120	95	70	12	4	15	80	8
20	75	125	100	75	14	4	15	100	10
25	85	140	125	90	14	4	19	125	10
32	90	145	135	100	16	4	19	125	10
40	100	160	140	105	16	4	19	140	12

Marine Bronze Angle Valves JIS F7304 16K

Marine Bronze Screw Down Check Angle Valves JIS F7410 16K

Capability:

Nominal Pressure	16kgf/cm ² (1.56Mpa)
Seal Pressure	18kgf/cm ² (1.76Mpa)
Intensity Pressure	24kgf/cm ² (2.36Mpa)

Medium	Max Pressure: kgf/cm ² (Mpa)
Oil & flow water	16 kgf/cm ² (1.57Mpa)
Lentic water ≤ 120°C	22 kgf/cm ² (2.16Mpa)

Materials of Body/Trim:

Part name	Material	
	Name	Mark
Body, Bonnet	Tin-bronze	ZQSn10-21
Disc, Seat	Albronze	QAL9-21
Packing	PTFE	SFT-2