

SJ PLUS/EVO



SUPERDRY SINGLE JET METER

SJ Plus / Evo represents the new generation of single jet meter for residential use. The innovative automated production line combines high production capacity with the highest quality. Sj Plus/Evo achieves the highest metrological performance in its category. It can be equipped with the latest remote data transmission technologies.



CHRYSSAFIDIS

 **maddalena**[®]


METERING EXPERTISE



SJ PLUS/EVO

FEATURES

- Superdry single jet meter for hot or cold water
- Ideal for domestic indoor divisional applications (submetering)
- MID-certified: R max 160 ▪ DN: 15 and 20
- Options available for reed switch (Plus) or static (Evo) pulse emitter)
- Health certifications available for a number of countries
- Supports various installation positions
- High protection against external magnetic fields
- Register can be rotated 360°
- Can be provided fitted with wired or radio communication module




SJ




SJ EVO

TYPICAL ERROR CURVE

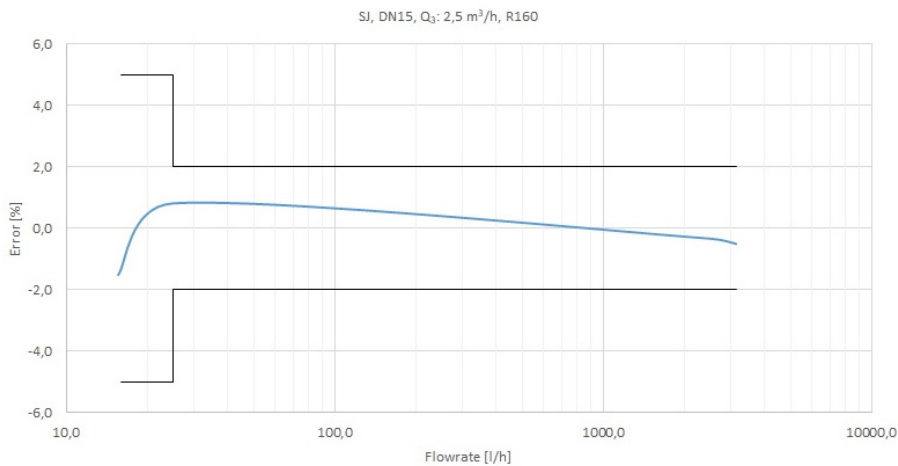

HEAD LOSS DIAGRAM

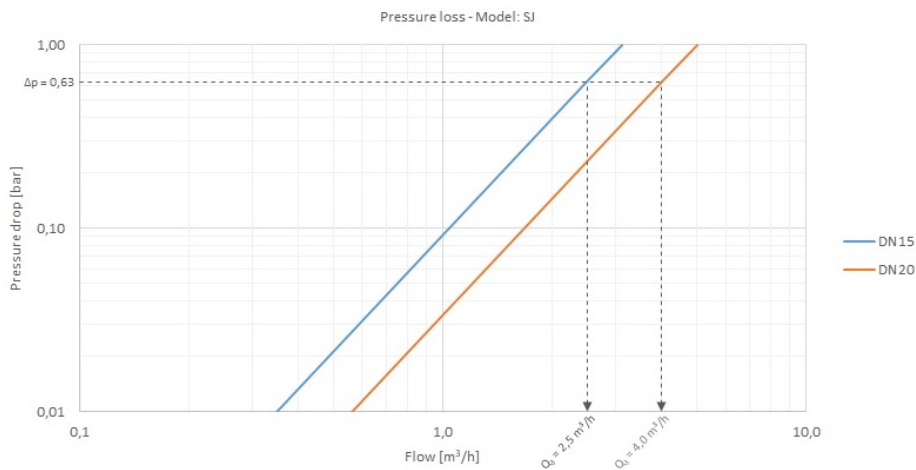

HYDRAULIC PERFORMANCE

Size	mm	15	20
	in	½	¾

Modulo B no. TCM 142/20 – 5700

Modulo D no. 0119-SJ-A010-08

Q ₃ /Q ₁ = R Referred to installation position	H↑ ≤ 100 H→; V↓ ≤ 50 V↑ ≤ 40	H↑ ≤ 160 H→; V↓ ≤ 80 V↑ ≤ 63	H↑ ≤ 100 H→; V↓ ≤ 50 V↑ ≤ 40	H↑ ≤ 160 H→; V↓ ≤ 80 V↑ ≤ 63
---	------------------------------------	------------------------------------	------------------------------------	------------------------------------

MID standard performance *


Q ₃	m ³ /h	1,6	2,5	4
Q ₄	m ³ /h	2	3,13	5
R			100	
Q ₁	l/h	16	25	40
Q ₂	l/h	25,60	40	64

* Other values of R available upon request.

TECHNICAL DATA


Maximum permissible error between Q ₁ and Q ₂ (excluded)		+/- 5%	
Maximum permissible error between Q ₂ (included) and Q ₄		+/- 2% with water temperature ≤ 30°C +/- 3% with water temperature > 30°C	
Temperature class		T30, T50, T30/90	
Flow profile sensitivity classes		U0 – D0	
Starting flow rate	l/h	6	8
Head loss		ΔP63	
Nominal pressure	bar	16	
Maximum reading	m ³	100.000	
Minimum reading	m ³	0,05	
Indicative weight	kg	0,35	0,45



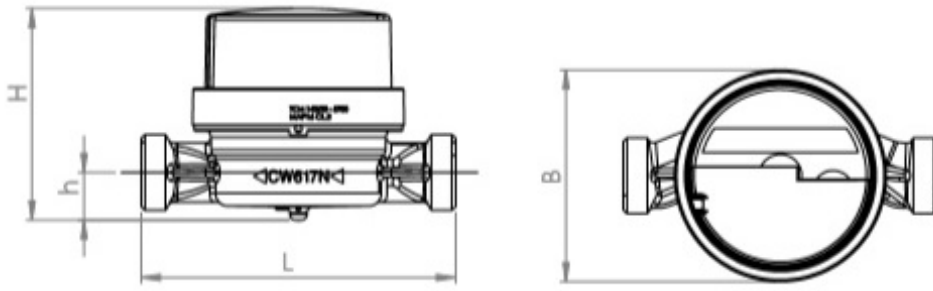

Size	mm	15	20
	in	1/2	3/4
Thread	in	G 3/4 B	G 1 B
	mm	80*/110/115/120/130 *only Q ₃ 2,5 R ≤H100 VR63	115/130
H	mm		74
h	mm	11,7	16,7
B	mm		65

COMMUNICATION MODULES



For more information on all the accessories available, consult the specific technical data sheets on the website www.maddalena.it



CHRYSSAFIDIS S.A./ATHENS: 3 AGRINIOU STR, TAVROS - (+30) 210 4836315-20 / THESSALONIKI: DA12A STR, OT32, BIPE SINDOU - (+30) 2310 754681-4 / www.chryssafidis.com / sales@chryssafidis.gr

