CHRYSSAFIDIS

ΕΣΩΤΕΡΙΚΕΣ ΒΑΛΒΙΔΕΣ

Application


Designed primarily for use with LP-Gas and anhydrous ammonia as a main valve on small capacity pumping systems, NH3 nurse tanks and in-line installations. It may also be installed in the vapor equalizing opening on bobtail delivery trucks. Installation is quick and easy, and it fits in both full and half couplings, as well as, in-line applications. The valve may be actuated manually by hand or cable.

Features


- Valve is compact, with one piece body construction.
- Spring loaded V-packing with heavy duty wiper ring on operating shaft for dependable leak-free construction.
- Nylon bearing supported operating shaft provides smooth, easy operation.
- Simple operating lever allows for easy connection of cable controls.
- Built in excess flow valve
- Return spring forces the valve to the closed position when the lever is released.
- All critical operating components are located in the valve body and inside the container coupling for maximum protection against damage.
- Midway stem position allows for quick pressure equalization.
- Equipped with 212° F, UL listed fuse link for thermal protection.


Materials

Body	Ductile Iron
Operating Lever	Cadmium Plated Carbon Steel
Stem	Stainless Steel
Springs	Stainless Steel
Seat Disc	Resilient Synthetic Rubber
Shaft Bearing	Nylon

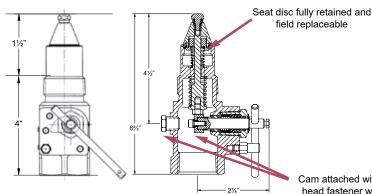

Cam attached with Allen head fastener which is accessed from the 1/4" pipe plug on side of the body

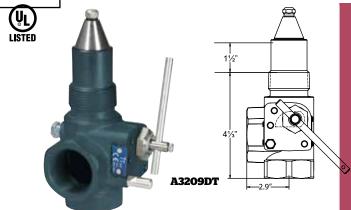

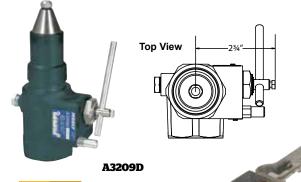




REGO



G

A3209PAF

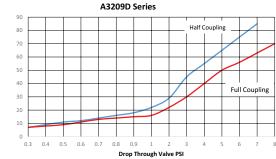

Ordering Information

<u> </u>											
Part Number	Inlet Connection M. NPT	Outlet Connection F. NPT	Closing Flow		LP-Gas Vapor Capacity**(SCFH/Propane)		Accessories				
			LP-Gas	NH3	25 PSIG	100 PSIG	Thermal Latch	Pneumatic Actuators	Electric Actuators		
A3209D050	11⁄4"	1¼"	50	45	13,300	22,900	- A3209TL	A3209PA A3209PAF	A3209EA		
A3209D080	11⁄4"	11⁄4"	80	72	15,700	26,700					
A3209DT050*	11⁄4"	11⁄4"	50	45	13,300	22,900					
A3209DT080*	11⁄4"	11⁄4"	80	72	15,700	26,700					

^{*} T-Body Design